

Material

- Glazed titanium steel

Features


- ANTIGLISS included
- Integrated tile flanges
- Option made to measure



Compatible drain fittings

- Geberit offset, PP 150.183.00.1 (rough-in unit)
- Mountain Plumbing offset, brass BDR20SBR45/FFF (cable drive)
- OS&B direct, brass 307DQ-30FFF (clicker)
- OS&B offset, brass 314Q15-20-FFFF (clicker)
- OS&B offset, ABS 6040QK-FFF (clicker)
- OS&B offset, PVC 5150QK-FFF (clicker)
- Watco offset, brass 551/552 - NY D4
- Watco offset, brass 538 D5 (cable-drive)
- Watco offset, brass 591 EX8 D8
- Watco offset, ABS/PVC 900 EX6 D8
- Watco offset, ABS/PVC 429 D9
- Watco offset, ABS/PVC 938 D2 (cable-drive)

| Variant no | Color | Tile flange |
|------------------------------------|----------------|--|
| <input type="checkbox"/> 2518-0002 | C1 white gloss | TF00 no tile flange |
| <input type="checkbox"/> 2518-0003 | C1 white gloss | TF05 tile flanges on 3 sides, drain center |
| <input type="checkbox"/> 2518-0005 | C1 white gloss | TF06 tile flanges on 2 sides, left corner |
| <input type="checkbox"/> 2518-0006 | C1 white gloss | TF07 tile flanges on 2 sides, right corner |



Colors

- C058 White matte
- C__ Color class III,VI




➔ color list

Accessories

Options

- CE1 CLEANEFFECT
- HS1 Handle SAFE

05/01/2026 Subject to technical changes.

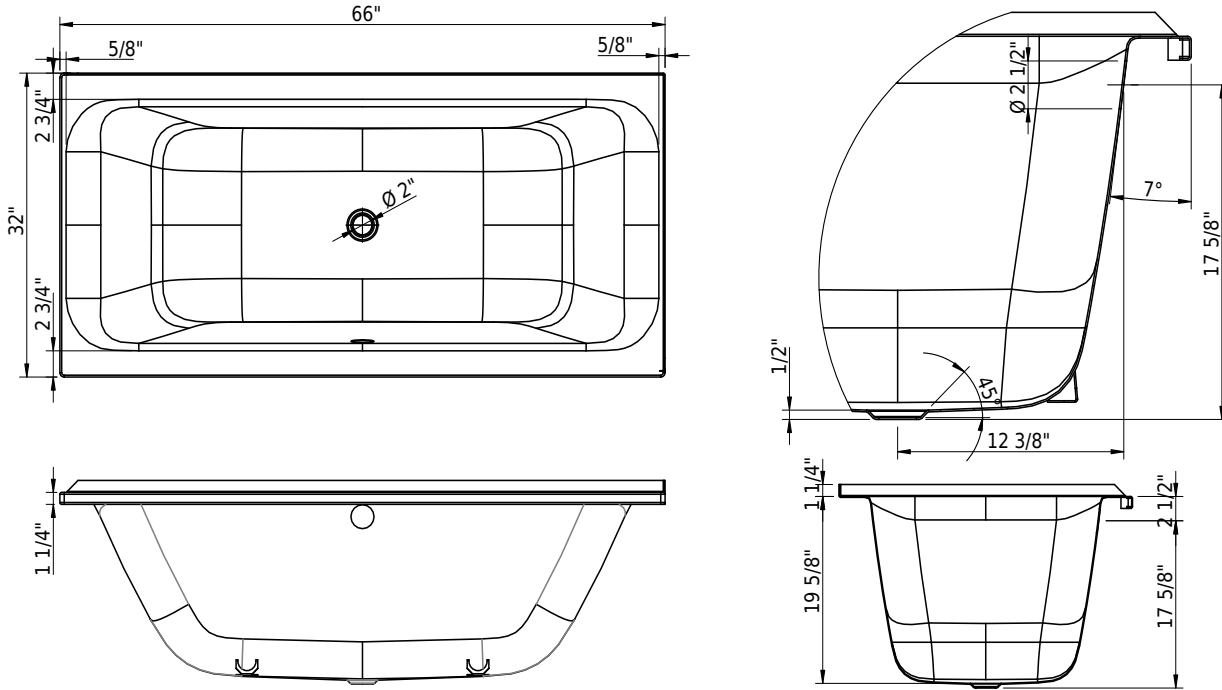

Technical Information

| | |
|---------------------------------|---------|
| Installation location | corner |
| Weight without water | 113 lbs |
| Water depth to overflow | 15 7/8" |
| Max. water capacity to overflow | 70 gal |
| Drain opening | 2" |
| Overflow hole diameter | 2 1/2" |



➤ Installation Instructions

Standards / Codes

- This product complies with
- ASME A112.19.1 / CSA B45.2
- ASTM F462
- ADA

Notes

- Right hand outlet shown
- Bath faucet not included
- Refer to installation instructions
- We recommend the use of Schmidlin adjustable installation feet

Important: Dimensions of fixtures are nominal and may vary within the range tolerances established by ANSI standard A112.19.4. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet.